

Torqueleader 'Quickset' Calibrated Screwdrivers

Extensive range of 12 models to cover all requirements

Torque range

Quickset screwdrivers feature scales calibrated in either ISO or Imperial units and cover a torque range of 20 cN.m to 9 N.m (20 ozf.in - 80lbf.in).

Eliminates over-tightening

Smooth 'slipping' mechanism signals when the set torque has been achieved and completely eliminates overtightening.

Bi-directional operation with consistent repeat accuracy.

Auto resetting

Precision radial ball clutch and cam design gives automatic resetting.

Choice of drive type

All models are available with either 1/4" Square Drive (SD) spindle for use with nut sockets or with 1/4" Female Hex (FH) to suit screwdriver bits.

Micrometer adjustment

Micrometer adjustment on all models allows easy, accurate setting.

The adjustment ring automatically disengages when tool is in use, preventing accidental adjustment.

Versatile tools

Ideal for the application of low torque values to fasteners in areas such as electrical, electronics and instrument assembly.

Extra leverage

Removable Tee Bar on larger models provides extra leverage where required. Note: Does not affect torque setting or accuracy.

Accessories

Wide range of accessories available including boxed set.

NEW

'Ergo' Quickset range available.


With micrometer-type adjustment, positive 'feel' setting system.



Quickset 9 SD



Quickset 5-50 FH

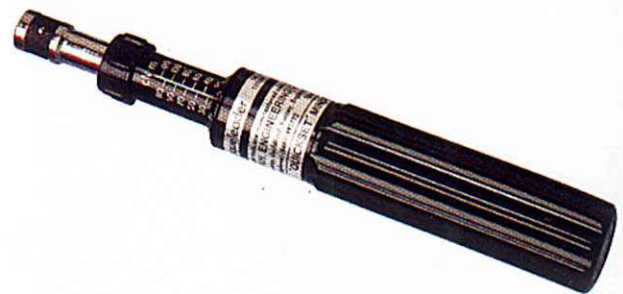

Quickset Minor Metric rH



Quickset Minor Imp SD




Sliding Tee Bar

The preferred and certified ranges of these tools is in accordance with the requirements of ISO 6789 : 1992.




Torqueleader 'Quickset' Calibrated Screwdrivers WITH MICROMETER-TYPE ADJUSTMENT


Quickset Minor SD

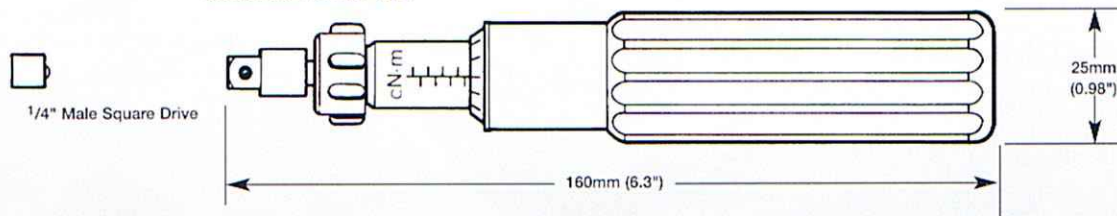


Quickset Minor FH

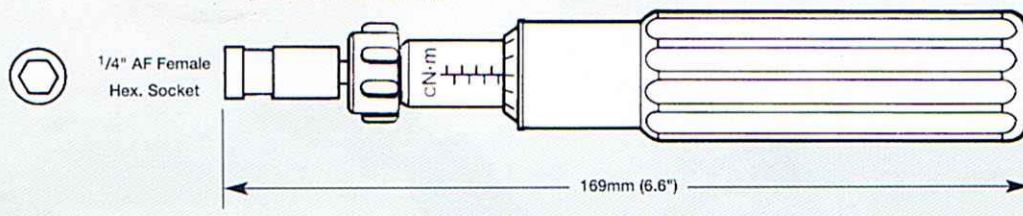

Quickset 6/5-50/9/40-80 SD

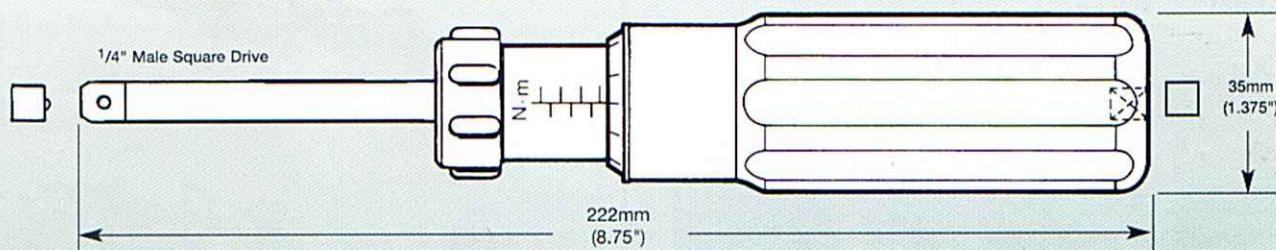

Quickset 6/5-50/9/40-80 FH

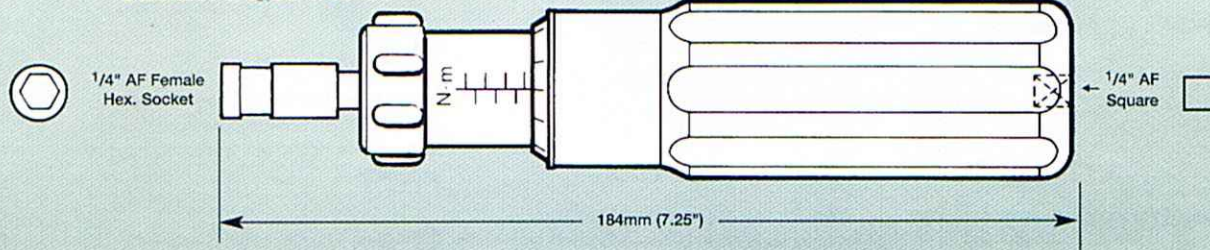

Designed and manufactured to meet the accuracy and repeatability requirements of ISO 6789:1992

MODEL	ordering codes	RANGE	INCREMENT	Length		Weight		COLOUR
				mm	in	gm	oz	
QUICKSET MINOR* Metric SD	016000	20 - 120 cN.m	1 cN.m	160	6.3	158	5.5	BLACK
QUICKSET MINOR Metric FH	016040	20 - 120 cN.m	1 cN.m	169	6.6	165	6	BLACK
QUICKSET MINOR* Imp. SD	016020	20 - 120 ozf.in	1 ozf.in	160	6.3	158	5.5	BLACK
QUICKSET MINOR Imp. FH	016060	20 - 120 ozf.in	1 ozf.in	169	6.6	165	6	BLACK
QUICKSET 6* SD†	016100	1 - 6 N.m	0.1 N.m	222	8.7	340	12	RED
QUICKSET 6 FH†	016500	1 - 6 N.m	0.1 N.m	184	7.3	335	11.8	RED
QUICKSET 5 - 50* SD†	016200	5 - 50 lbf.in	1 lbf.in	222	8.7	340	12	RED
QUICKSET 5 - 50 FH†	016600	5 - 50 lbf.in	1 lbf.in	184	7.3	335	11.8	RED
QUICKSET 9* SD†	016300	4 - 9 N.m	0.1 N.m	222	8.7	340	12	GREEN
QUICKSET 9 FH†	016700	4 - 9 N.m	0.1 N.m	184	7.3	335	11.8	GREEN
QUICKSET 40 - 80* SD†	016400	40 - 80 lbf.in	1 lbf.in	222	8.7	340	12	GREEN
QUICKSET 40 - 80 FH†	016800	40 - 80 lbf.in	1 lbf.in	184	7.3	335	11.8	GREEN